



FEATURES

- 2 WATTS MAXIMUM OUTPUT POWER
- SMD AND DIP PACKAGE, 0.74 x 0.50 x 0.33 INCH
- SMD PACKAGE QUALIFIED FOR LEADFREE REFLOW SOLDER PROCESS ACCORDING IPC J-STD-020D
- 4:1 ULTRA WIDE INPUT VOLTAGE RANGE
- HIGH EFFICIENCY UP TO 82%
- INPUT TO OUTPUT ISOLATION: 1600VDC
- LOW RIPPLE & NOISE
- EXTERNAL ON/OFF CONTROL
- SWITCHING FREQUENCY (100KHz, MIN)
- CONTINUOUS SHORT CIRCUIT PROTECTION
- UL94-V0 PACKAGE MATERIALS
- CE MARK MEETS 2006/95/EC, 93/68/EEC AND 2004/108/EC
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Measurement Equipment
Semiconductor Equipment

OPTIONS

3000VDC ISOLATION

DESCRIPTION

The PDS02W(SMD type), PDH02W(DIP type) offer 2 watts of output power from a 0.74 x 0.50 x 0.33 inch package without derating to 85°C. The PDS(H)02W series have 4:1 ultra wide input voltage of 4.5~18, 9~36, and 18~75VDC and features 3000VDC of isolation, short-circuit protection.

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS		
Output power	2 Watts, max.	
Voltage accuracy	± 1%	
Minimum load	0%	
Line regulation	LL to HL at Full Load ± 0.2%	
Load regulation	No load to Full load	Single ±1.0%
		Dual ±1.0%
	10% load to 90% load	Single ±0.5%
		Dual ±0.8%
Cross regulation (Dual)	Asymmetrical load 25%/100% FL ±5%	
Ripple and noise	20MHz bandwidth See table	
Temperature coefficient	±0.02% / °C, max.	
Transient response recovery time	25% load step change 250µS	
Short circuit protection	Continuous, automatic recovery	

GENERAL SPECIFICATIONS	
Efficiency	See table
Isolation voltage	Standard 1600VDC, min. 1minute Suffix "H" 3000VDC, min. 1minute
Isolation resistance	10 ⁹ ohms, min.
Isolation capacitance	Standard 50pF, max. Suffix "H" 50pF, max.
Switching frequency	100KHz, min.
Approvals and standard	IEC60950-1, UL60950-1, EN60950-1
Dimensions	0.74 x 0.50 x 0.33 Inch (18.9 X 12.8 X 8.4 mm)
Weight	4.5g(0.16oz)
MTBF(Note 1)	BELLCORE TR-NWT-000332 4.615 x 10 ⁶ hrs MIL-HDBK-217F 2.052 x 10 ⁶ hrs


EMC CHARACTERISTICS	
EMI (Note 6)	EN55022 Class A
ESD	EN61000-4-2 Air ± 8KV Contact ± 6KV Perf. Criteria A
Radiated immunity	EN61000-4-3 10 V/m Perf. Criteria A
Fast transient (Note 7)	EN61000-4-4 ± 2KV Perf. Criteria A
Surge (Note 7)	EN61000-4-5 ± 1KV Perf. Criteria A
Conducted immunity	EN61000-4-6 10 Vr.m.s Perf. Criteria A

INPUT SPECIFICATIONS	
Input voltage range	12VDC nominal input 4.5 ~ 18VDC
	24VDC nominal input 9 ~ 36VDC
	48VDC nominal input 18 ~ 75VDC
Input filter	Capacitor type
Input surge voltage	12VDC input 25VDC 1sec, max.
	24VDC input 50VDC 1sec, max.
	48VDC input 100VDC 1sec, max.
Input reflected ripple current(Note 6)	12VDC input 80mA-p-p
	24VDC input 40mA-p-p
	48VDC input 30mA-p-p
Start up time	Nominal input and constant resistive load Power up 5mS
	Remote ON/OFF Remote ON/OFF 5mS
Remote ON/OFF	DC-DC ON Open or high impedance
	DC-DC OFF Control pin applied current 2 ~ 4mA max(via 1KΩ)
Remote off state input current	Nominal input 2.5mA, max.

Application circuit:



ENVIRONMENTAL SPECIFICATIONS	
Operating ambient temperature	-40°C ~ +85°C (non-derating)
Storage temperature range	-55°C ~ +125°C
Thermal shock	MIL-STD-810F
Vibration	MIL-STD-810F
Relative humidity(non-condensing)	5% to 90% RH
Lead-free reflow solder process	IPC J-STD-020D
Moisture sensitivity level(MSL)	IPC J-STD-033B Level 2a

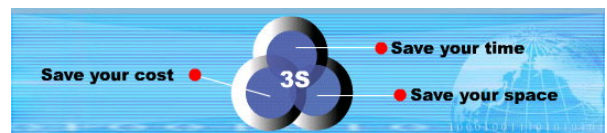




Model Number	Input Range	Output Voltage	Output Current		Output (4) Ripple & Noise	Input Current		Eff (4) (%)	Capacitor (5) Load max
			Min. load	Full load		No load(3)	Full load(2)		
PDS02-12S3P3W	4.5 ~ 18 VDC	3.3 VDC	0mA	500mA	30mVp-p	30mA	196mA	74	3300uF
PDS02-12S05W	4.5 ~ 18 VDC	5 VDC	0mA	400mA	30mVp-p	30mA	222mA	79	1680uF
PDS02-12S09W	4.5 ~ 18 VDC	9 VDC	0mA	222mA	30mVp-p	30mA	222mA	79	1000uF
PDS02-12S12W	4.5 ~ 18 VDC	12 VDC	0mA	167mA	30mVp-p	30mA	219mA	80	820uF
PDS02-12S15W	4.5 ~ 18 VDC	15 VDC	0mA	134mA	30mVp-p	35mA	216mA	81	680uF
PDS02-12D05W	4.5 ~ 18 VDC	±5 VDC	0mA	±200mA	30mVp-p	35mA	231mA	76	±1000uF
PDS02-12D12W	4.5 ~ 18 VDC	±12 VDC	0mA	±83mA	30mVp-p	35mA	216mA	81	±470uF
PDS02-12D15W	4.5 ~ 18 VDC	±15 VDC	0mA	±67mA	30mVp-p	35mA	216mA	81	±330uF
PDS02-24S3P3W	9 ~ 36 VDC	3.3 VDC	0mA	500mA	30mVp-p	20mA	98mA	74	3300uF
PDS02-24S05W	9 ~ 36 VDC	5 VDC	0mA	400mA	30mVp-p	20mA	111mA	79	1680uF
PDS02-24S09W	9 ~ 36 VDC	9 VDC	0mA	222mA	30mVp-p	20mA	111mA	79	1000uF
PDS02-24S12W	9 ~ 36 VDC	12 VDC	0mA	167mA	30mVp-p	20mA	110mA	80	820uF
PDS02-24S15W	9 ~ 36 VDC	15 VDC	0mA	134mA	30mVp-p	20mA	107mA	82	680uF
PDS02-24D05W	9 ~ 36 VDC	±5 VDC	0mA	±200mA	30mVp-p	20mA	116mA	76	±1000uF
PDS02-24D12W	9 ~ 36 VDC	±12 VDC	0mA	±83mA	30mVp-p	20mA	110mA	80	±470uF
PDS02-24D15W	9 ~ 36 VDC	±15 VDC	0mA	±67mA	30mVp-p	20mA	108mA	81	±330uF
PDS02-48S3P3W	18 ~ 75 VDC	3.3 VDC	0mA	500mA	30mVp-p	10mA	49mA	74	3300uF
PDS02-48S05W	18 ~ 75 VDC	5 VDC	0mA	400mA	30mVp-p	10mA	56mA	78	1680uF
PDS02-48S09W	18 ~ 75 VDC	9 VDC	0mA	222mA	30mVp-p	10mA	56mA	79	1000uF
PDS02-48S12W	18 ~ 75 VDC	12 VDC	0mA	167mA	30mVp-p	10mA	54mA	81	820uF
PDS02-48S15W	18 ~ 75 VDC	15 VDC	0mA	134mA	30mVp-p	10mA	53mA	82	680uF
PDS02-48D05W	18 ~ 75 VDC	±5 VDC	0mA	±200mA	30mVp-p	10mA	58mA	76	±1000uF
PDS02-48D12W	18 ~ 75 VDC	±12 VDC	0mA	±83mA	30mVp-p	10mA	54mA	81	±470uF
PDS02-48D15W	18 ~ 75 VDC	±15 VDC	0mA	±67mA	30mVp-p	10mA	54mA	81	±330uF

Note


- BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment)
- Maximum value at nominal input and full load.
- Typical value at nominal input and no load.
- Typical value at nominal input and full load.
- Test by minimum input and constant resistive load.
- The PDS(H)02W series meet EN55022 Class A and input reflected ripple current with external L-C filter before the input pins to the converter. (Connect networks following Class B figure.)
Recommend:
12VDC input: C1= 10uF/25V 1812 MLCC, C3=220pF/3KV 1808 MLCC, L1=2.2uH 0504 SMD Inductor P/N:PMT-059.
24VDC input: C1=6.8uF/50V 1812 MLCC, C3=220pF/3KV 1808 MLCC, L1=18uH 0504 SMD Inductor P/N:PMT-046.
48VDC input: C1=4.7uF/100V 1812 MLCC, C3=220pF/3KV 1808 MLCC, L1=18uH 0504 SMD Inductor P/N:PMT-046.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220 μF/100V, ESR 48mΩ.

CAUTION: This power module is not internally fused. An input line fuse must always be used.

PDS02-48S05W Efficiency VS Input Voltage

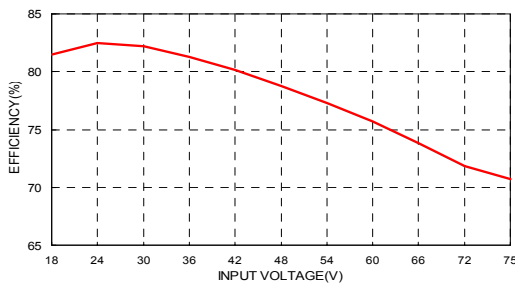


PDS02-48S05W Efficiency VS Output Load

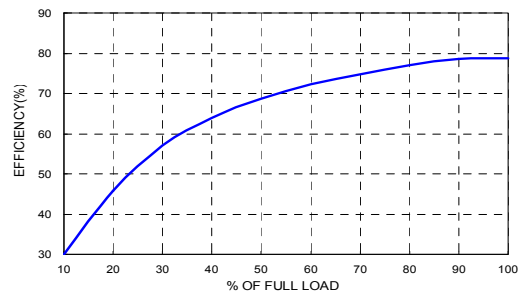




Mechanical Drawing:

SMD TYPE

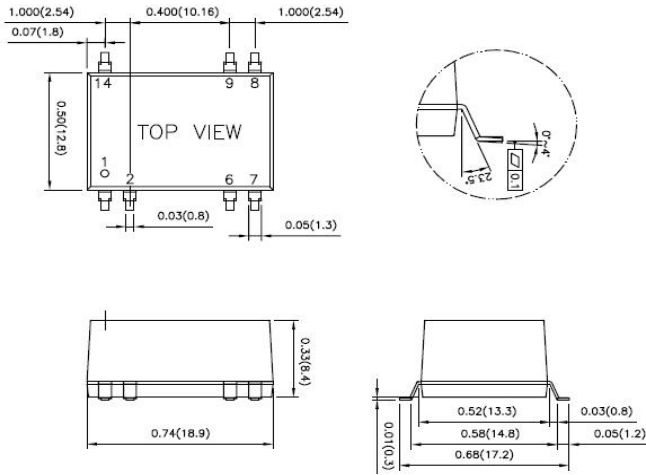


DIP TYPE

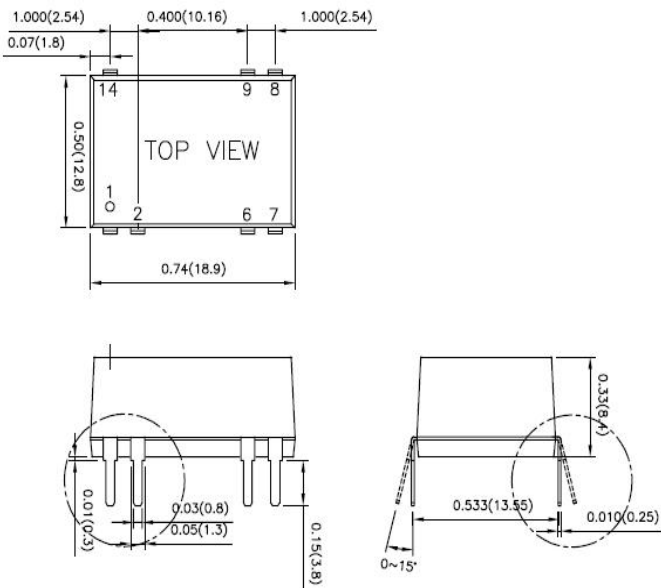

1. All dimensions in Inch (mm)
Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
2. Pin pitch tolerance ±0.01(0.25)
3. Pin dimension tolerance ±0.004 (0.1)


Recommended EMI Filter:

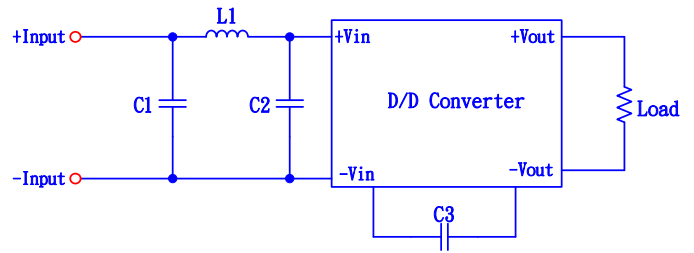

Recommended Filter for EN55022 Class B Compliance

The components used in the above figure, together with the manufacturers' part numbers for these components, are as follows:

	C1 - C2	C3	L1
PDS(H)02-12xxxW	10µF/25V 1812 MLCC	220pF/3KV 1808 MLCC	2.2µH 0504 SMD Inductor PMT-059
PDS(H)02-24xxxW	2.2µF/50V 1812 MLCC	220pF/3KV 1808 MLCC	18µH 0504 SMD Inductor PMT-046
PDS(H)02-48xxxW	2.2µF/100V 1812 MLCC	220pF/3KV 1808 MLCC	27µH 0504 SMD Inductor PMT-

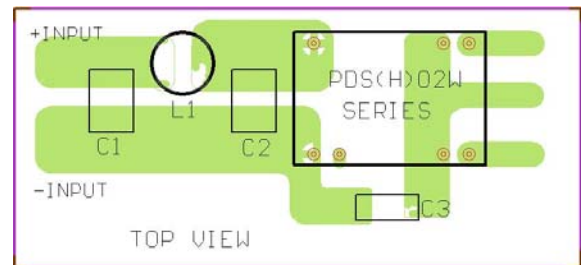

Recommended EN55022 Class B Filter Circuit Layout

PIN CONNECTION		
PIN	SINGLE	DUAL
1	- INPUT	- INPUT
2	ON/OFF	ON/OFF
6	NC	COMMON
7	NC	-OUTPUT
8	+OUTPUT	+OUTPUT
9	-OUTPUT	COMMON
14	+ INPUT	+ INPUT

