



P-DUKE POWER

FEC60 Series

DC-DC Converter
Up to 60 Watts

3
YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway

UL US CB CE UK CA

1600
VDC
Isolation
Voltage

2 : 1
Input
Range

6
sided
Shielding

NO
Min. Load
Required

REMOTE
ON
OFF

OCP

OTP

OVP

SCP

UVP

PART NUMBER STRUCTURE

FEC60 -	48	S	05	-	N	HC
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)		Remote On/Off Options	Assembly Options
	24:18~36 48:36~75	S:Single	3P3:3.3 05:5 12:12 15:15		<input type="checkbox"/> : Positive logic N: Negative logic	<input type="checkbox"/> : None HC: Heat-sink with Clamp

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	A	mA	%	μF
FEC60-24S3P3	18 ~ 36	3.3	14	100	89	36000
FEC60-24S05	18 ~ 36	5	12	130	90	20400
FEC60-24S12	18 ~ 36	12	5	50	90	3550
FEC60-24S15	18 ~ 36	15	4	50	90	2300
FEC60-48S3P3	36 ~ 75	3.3	14	80	89	36000
FEC60-48S05	36 ~ 75	5	12	90	91	20400
FEC60-48S12	36 ~ 75	12	5	30	90	3550
FEC60-48S15	36 ~ 75	15	4	30	90	2300

INPUT SPECIFICATIONS							
Parameter	Conditions		Min.	Typ.	Max.	Unit	
Operating input voltage range	24Vin(nom)		18	24	36	VDC	
	48Vin(nom)		36	48	75		
Start up voltage	24Vin(nom)					18	VDC
	48Vin(nom)					36	
Shutdown voltage	24Vin(nom)		14.5	15.5	17.5	VDC	
	48Vin(nom)		31	32	35.5		
Start up time	Constant resistive load	Power up				20	ms
		Remote ON/OFF				20	
Input surge voltage	100 ms, max.	24Vin(nom)				50	VDC
		48Vin(nom)				100	
Input filter	Pi type						
Remote ON/OFF	Referred to -Vin pin	Positive logic (Standard)	DC-DC ON	Open or 3 ~ 12VDC			
			DC-DC OFF	Short or 0 ~ 1.2VDC			
		Negative logic (Option)	DC-DC ON	Short or 0 ~ 1.2VDC			
			DC-DC OFF	Open or 3 ~ 12VDC			
		Input current of Ctrl pin		-0.5		+1.0	mA
	Remote off input current		4.0			mA	

OUTPUT SPECIFICATIONS							
Parameter	Conditions		Min.	Typ.	Max.	Unit	
Voltage accuracy			-1.0		+1.0	%	
Line regulation	Low Line to High Line at Full Load		-0.2		+0.2	%	
Load regulation	No Load to Full Load		-0.5		+0.5	%	
Voltage adjustability			-10		+10	%	
Ripple and noise	Measured by 20MHz bandwidth	3.3Vout, 5Vout				75	mVp-p
		12Vout, 15Vout				100	
Temperature coefficient			-0.02		+0.02	%/°C	
Transient response recovery time	25% load step change					250	μs
Over voltage protection	3.3Vout		3.7		5.4	VDC	
	5Vout		5.6		7.0		
	12Vout		13.8		17.5		
	15Vout		16.8		20.5		
Over load protection	% of Iout rated					150	%
Short circuit protection						Continuous, automatics recovery	

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute Input to Output Input(Output) to Case	1600 1600			VDC
Case grounding					Connect case to -Vin with decoupling Y Cap
Isolation resistance	500VDC	1			GΩ
Isolation capacitance				1500	pF
Switching frequency		270	300	330	kHz
Safety approvals	IEC/ EN/ UL62368-1				UL:E193009 CB: UL(Demko)
Case material					Nickel-coated copper
Base material					FR4 PCB
Potting material					Epoxy (UL94 V-0)
Weight					60g (2.11oz)
MTBF	MIL-HDBK-217F, Full load				4.089 x 10 ⁵ hrs

ENVIRONMENTAL SPECIFICATIONS


Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	Without derating With derating	-40 +40		+40 +110	°C
Maximum case temperature				110	°C
Over temperature protection			120		°C
Storage temperature range		-55		+125	°C
Thermal impedance	Without heat-sink With heat-sink		10.5 8.4		°C/W
Thermal shock					MIL-STD-810F
Vibration					MIL-STD-810F
Relative humidity					5% to 95% RH

EMC SPECIFICATIONS


Parameter	Conditions	Level
EMI	EN55032 With external components	Class A, Class B
EMS	EN55024	
ESD	EN61000-4-2 Air ± 8kV and Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 10 V/m	Perf. Criteria A
Fast transient	EN61000-4-4 ± 2kV	Perf. Criteria A
Surge	EN61000-4-5 ± 1kV With an external input filter capacitor (Nippon chemi-con KY series, 220μF/100V)	Perf. Criteria A
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

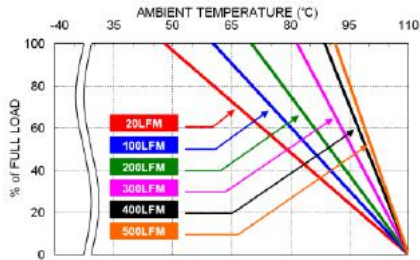


FEC60-48S05 Derating Curve

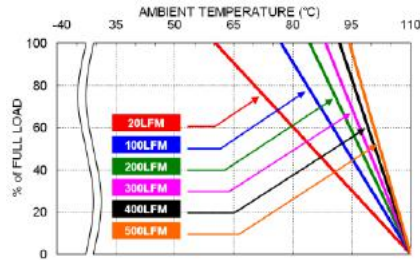

FEC60-48S05 Derating Curve With Heat-sink

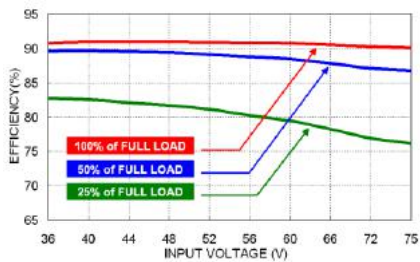

FEC60-48S05 Efficiency vs. Input Voltage

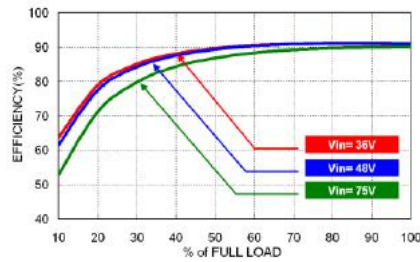

FEC60-48S05 Efficiency vs. Output Load

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.


To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.

The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
FEC60-24S□□	6.3	Slow-Blow
FEC60-48S□□	3.15	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING

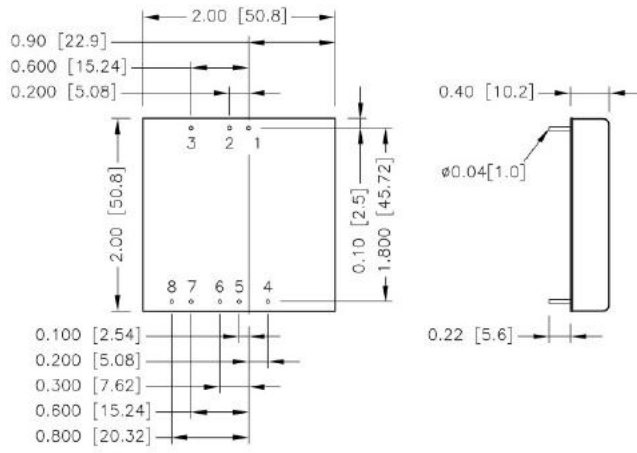

BOTTOM VIEW


PIN CONNECTION

PIN	DEFINE
1	+Vin
2	-Vin
3	Ctrl
4	-Sense
5	+Sense
6	+Vout
7	-Vout
8	Trim

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
3. Pin dimension tolerance ±0.004[0.10]

HEAT-SINK OPTIONS


-HC (Heat-sink with clamps)




* All dimensions in inch [mm]

RECOMMENDED PAD LAYOUT

Standard

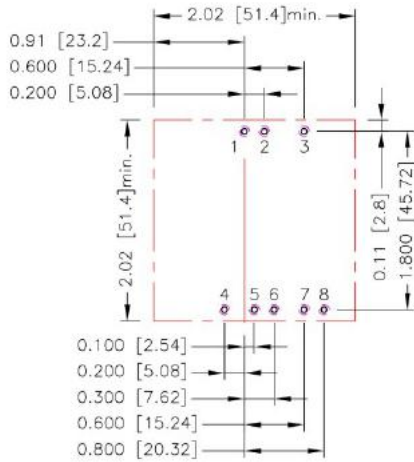

-HC

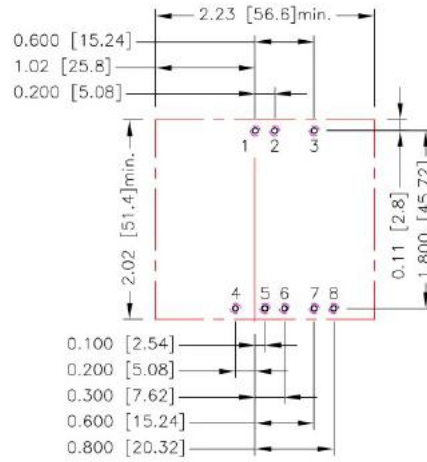


All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.3.4.5.6.7.8: $\varnothing 0.051[1.30]$
 Top view pad 1.2.3.4.5.6.7.8: $\varnothing 0.064[1.63]$
 Bottom view pad 1.2.3.4.5.6.7.8: $\varnothing 0.102[2.60]$

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed "Maximum case temperature". When operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).

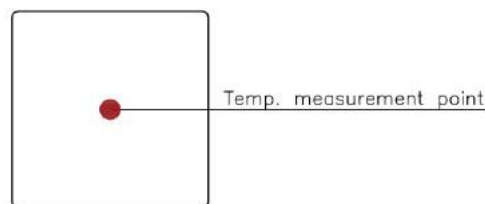


TOP VIEW

OUTPUT VOLTAGE ADJUSTMENT

Output voltage set point adjustment allows the user to increase or decrease the output voltage set point of the module. This is accomplished by connecting an external resistor between the Trim pin and either the +Sense or -Sense pins. With an external resistor between the Trim and -Sense, the output voltage set point increases. With an external resistor between the Trim and +Sense, the output voltage set point decreases. The external Trim resistor needs to be at least 1/16W resistors.

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.

Trim-up

□□S3P3

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.630
RU (k Ω)	57.930	26.165	15.577	10.283	7.106	4.988	3.476	2.341	1.459	0.753

□□S05

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	5.050	5.100	5.150	5.200	5.250	5.300	5.350	5.400	5.450	5.500
RU (k Ω)	36.570	16.580	9.917	6.585	4.586	3.253	2.302	1.588	1.032	0.588

□□S12


ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	12.120	12.240	12.360	12.480	12.600	12.720	12.840	12.960	13.080	13.200
RU (k Ω)	367.910	165.950	98.636	64.977	44.782	31.318	21.701	14.488	8.879	4.391

□□S15

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	15.150	15.300	15.450	15.600	15.750	15.900	16.050	16.200	16.350	16.500
RU (k Ω)	404.180	180.590	106.060	68.796	46.437	31.531	20.883	12.898	6.687	1.718

OUTPUT VOLTAGE ADJUSTMENT(CONTINUED)

Trim-down


□□S3P3

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.970
RD (k Ω)	69.470	31.235	18.490	12.117	8.294	5.745	3.924	2.559	1.497	0.647

□□S05

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	4.950	4.900	4.850	4.800	4.750	4.700	4.650	4.600	4.550	4.500
RD (k Ω)	45.533	20.612	12.306	8.152	5.660	3.999	2.812	1.922	1.230	0.676

□□S12

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	11.880	11.760	11.640	11.520	11.400	11.280	11.160	11.040	10.920	10.800
RD (k Ω)	460.990	207.950	123.600	81.423	56.118	39.249	27.199	18.162	11.132	5.509

□□S15

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	14.850	14.700	14.550	14.400	14.250	14.100	13.950	13.800	13.650	13.500
RD (k Ω)	499.820	223.410	131.270	85.204	57.563	39.136	25.974	16.102	8.424	2.282