



P-DUKE POWER

FED20W Series

DC-DC Converter
Up to 20 Watts

3
YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway

UL US CB CE UK CA

1600
VDC
Isolation
Voltage

4 : 1
Wide
Input
Range

6
sided
Shielding

NO
Min. Load
Required

REMOTE
ON
OFF

OCP

OVP

SCP

UVP

PART NUMBER STRUCTURE

FED20	-	48	S	05	W	-	M3	N	HC
Series Name		Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range		Operating Temp. Options	Remote On/Off Options	Assembly Options
		24:9~36 48:18~75	S:Single D: Dual	3P3:3.3 05:5 12:12 15:15 05:±5 12:±12 15:±15	4:1		□: Standard -40~+105°C With derating M3:M3 Version -55~+105°C With derating	□: Positive logic N: Negative logic	□: None HC: Heat-sink with Clamp

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	μF
FED20-24S3P3W	9 ~ 36	3.3	5500	50	85	18000
FED20-24S05W	9 ~ 36	5	4000	65	88	9600
FED20-24S12W	9 ~ 36	12	1670	22	86	1650
FED20-24S15W	9 ~ 36	15	1330	22	86	1050
FED20-24D05W	9 ~ 36	±5	±2000	55	88	±4800
FED20-24D12W	9 ~ 36	±12	±833	30	87	±825
FED20-24D15W	9 ~ 36	±15	±667	30	87	±525
FED20-48S3P3W	18 ~ 75	3.3	5500	35	85	18000
FED20-48S05W	18 ~ 75	5	4000	35	88	9600
FED20-48S12W	18 ~ 75	12	1670	15	87	1650
FED20-48S15W	18 ~ 75	15	1330	15	87	1050
FED20-48D05W	18 ~ 75	±5	±2000	35	89	±4800
FED20-48D12W	18 ~ 75	±12	±833	17	88	±825
FED20-48D15W	18 ~ 75	±15	±667	17	88	±525

INPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	24Vin(nom) 48Vin(nom)	9 18	24 48	36 75	VDC
Start up voltage	24Vin(nom) 48Vin(nom)			9 18	VDC
Shutdown voltage	24Vin(nom) 48Vin(nom)	7 14.5	8 16	8.8 17.5	VDC
Start up time	Constant resistive load Power up Remote ON/OFF		20 20		ms
Input surge voltage	100 ms, max. 24Vin(nom) 48Vin(nom)			50 100	VDC
Input filter				Pi type	
Remote ON/OFF	Referred to -Vin pin Positive logic DC-DC ON (Standard) DC-DC OFF Negative logic DC-DC ON (Option) DC-DC OFF Input current of Ctrl pin Remote off input current	-0.5	2.5	Open or 3 ~ 12VDC Short or 0 ~ 1.2VDC Short or 0 ~ 1.2VDC Open or 3 ~ 12VDC +0.5	mA mA

OUTPUT SPECIFICATIONS


Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy		-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load Single Dual	-0.2 -0.5		+0.2 +0.5	%
Load regulation	No Load to Full Load Single Dual	-0.5 -1.0		+0.5 +1.0	%
Cross regulation	Asymmetrical load 25%/100% FL Dual	-5.0		+5.0	%
Voltage adjustability	Single output	-10		+10	%
Ripple and noise	20MHz bandwidth With a 0.1μF/50V MLCC Single Dual		60 75 100		mVp-p
Temperature coefficient		-0.02		+0.02	%/°C
Transient response recovery time	25% load step change		250		μs
Over voltage protection	Zener diode clamp 3.3Vout 5Vout 12Vout 15Vout		3.9 6.2 15 18		VDC
Over load protection	% of Iout rated		150		%
Short circuit protection					Continuous, automatics recovery

GENERAL SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Input to Output Input (Output) to Case	1600 1600			VDC
Case grounding						Connect case to -Vin with decoupling Y Cap
Isolation resistance	500VDC		1			GΩ
Isolation capacitance					1500	pF
Switching frequency			360	400	440	kHz
Safety approvals	IEC/ EN/ UL 62368-1					UL:E193009 CB: UL(Demko)
Case material						Nickel-coated copper
Base material						FR4 PCB
Potting material						Epoxy (UL94 V-0)
Weight						27g (0.95oz)
MTBF	MIL-HDBK-217F, Full load					1.851 x 10 ⁶ hrs


ENVIRONMENTAL SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating ambient temperature	Standard M3	With derating With derating	-40 -55		+105 +105	°C
Maximum case temperature					105	°C
Storage temperature range			-55		+125	°C
Thermal impedance		Without heat-sink With heat-sink		12 10		°C/W
Thermal shock						MIL-STD-810F
Vibration						MIL-STD-810F
Relative humidity						5% to 95% RH

EMC SPECIFICATIONS			
Parameter	Conditions	Level	
EMI	EN55032	With external components	Class A, Class B
EMS	EN55024		
ESD	EN61000-4-2	Air ± 8kV and Contact ± 6kV	Perf. Criteria B
Radiated immunity	EN61000-4-3	10 V/m	Perf. Criteria A
Fast transient	EN61000-4-4	±2kV	Perf. Criteria B
Surge	EN61000-4-5	±1kV With an external input filter capacitor (Nippon chemi-con KY series, 220µF/100V)	Perf. Criteria A
Conducted immunity	EN61000-4-6	10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8	100A/m continuous; 1000A/m 1 second	Perf. Criteria A


CAUTION: This power module is not internally fused. An input line fuse must always be used.

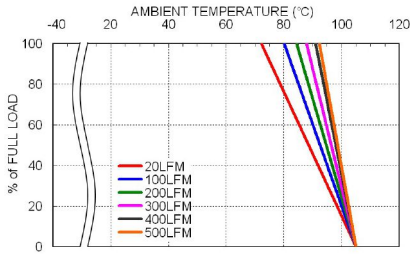CHARACTERISTIC CURVE


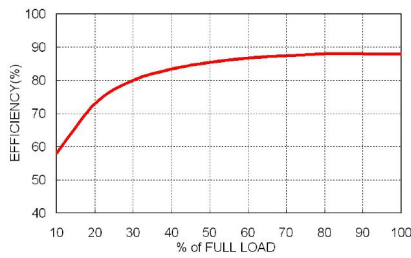
FED20-48S05W Derating Curve

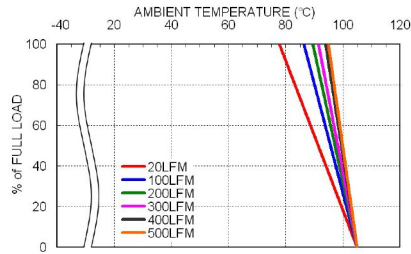

FED20-48S05W Derating Curve With Heat-sink

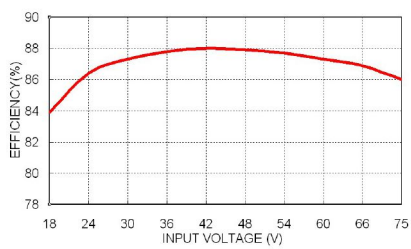

FED20-48S05W Efficiency vs. Input Voltage



FED20-48S05W Efficiency vs. Output Load

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.


To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.

The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
FED20-24S□□W、FED20-24D□□W	4	Slow-Blow
FED20-48S□□W、FED20-48D□□W	2	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING

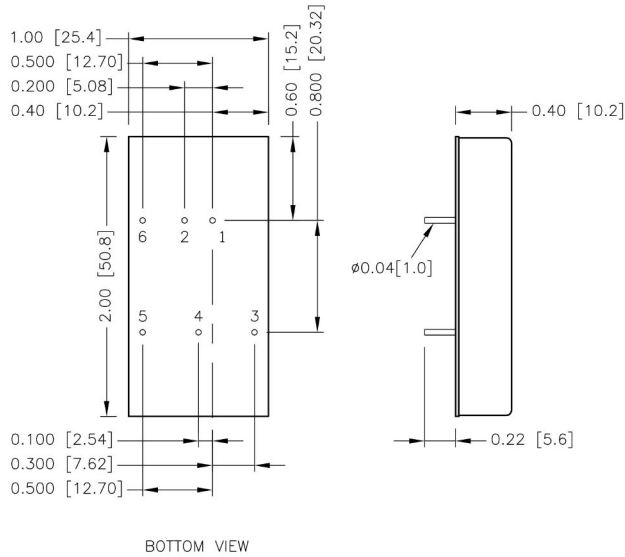


PIN CONNECTION

PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	Trim	Common
5	-Vout	-Vout
6	Ctrl	Ctrl

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
3. Pin dimension tolerance ±0.004[0.10]

HEAT-SINK OPTIONS


-HC (Heat-sink with clamps)

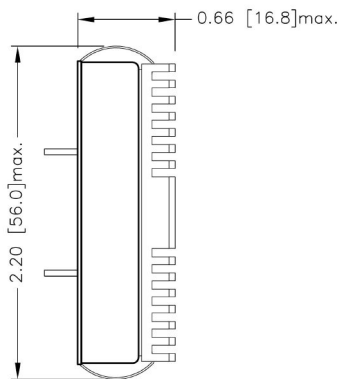


* All dimensions in inch [mm]

RECOMMENDED PAD LAYOUT

Standard

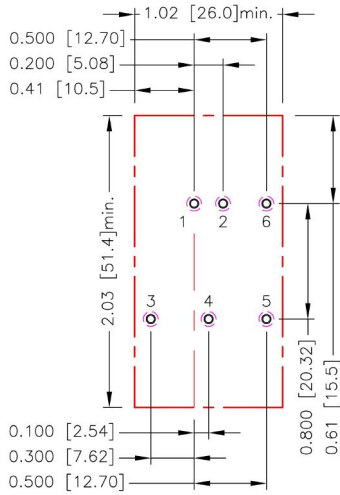

-HC

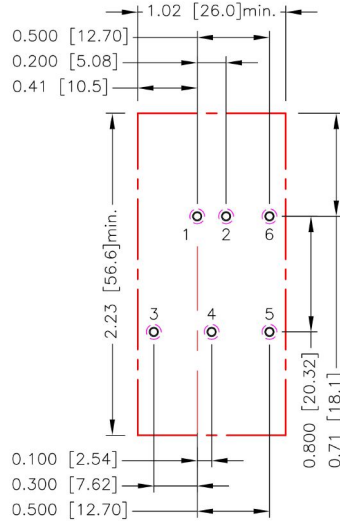


All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.3.4.5.6: $\varnothing 0.051[1.30]$
 Top view pad 1.2.3.4.5.6: $\varnothing 0.064[1.63]$
 Bottom view pad 1.2.3.4.5.6: $\varnothing 0.102[2.60]$

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding Environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed "Maximum case temperature". When Operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this Temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).

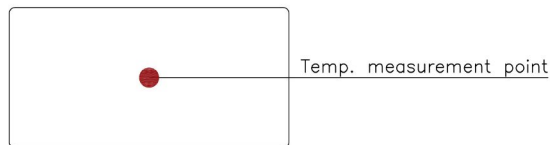

TOP VIEW


OUTPUT VOLTAGE ADJUSTMENT

Output voltage set point adjustment allows the user to increase or decrease the output voltage set point of the module. This is accomplished by connecting an external resistor between the Trim pin and either the +Output or -Output pins. With an external resistor between the Trim and -Vout, the output voltage set point increases. With an external resistor between the Trim and +Vout, the output voltage set point decreases. The external Trim resistor needs to be at least 1/16W of rated power.

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.

Trim-up



□□S3P3W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.630
RU (k Ω)	57.930	26.165	15.577	10.283	7.106	4.988	3.476	2.341	1.459	0.753

□□S05W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	5.050	5.100	5.150	5.200	5.250	5.300	5.350	5.400	5.450	5.500
RU (k Ω)	36.570	16.580	9.917	6.585	4.586	3.253	2.302	1.588	1.032	0.588


□□S12W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	12.120	12.240	12.360	12.480	12.600	12.720	12.840	12.960	13.080	13.200
RU (k Ω)	367.908	165.954	98.636	64.977	44.782	31.318	21.701	14.488	8.879	4.391

□□S15W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	15.150	15.300	15.450	15.600	15.750	15.900	16.050	16.200	16.350	16.500
RU (k Ω)	404.184	180.592	106.061	68.796	46.437	31.531	20.883	12.898	6.687	1.718

Trim-down



□□S3P3W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.970
RD (k Ω)	69.470	31.235	18.490	12.117	8.294	5.745	3.924	2.559	1.497	0.647

□□S05W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	4.950	4.900	4.850	4.800	4.750	4.700	4.650	4.600	4.550	4.500
RD (k Ω)	45.533	20.612	12.306	8.152	5.660	3.999	2.812	1.922	1.230	0.676

□□S12W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	11.880	11.760	11.640	11.520	11.400	11.280	11.160	11.040	10.920	10.800
RD (k Ω)	460.992	207.946	123.597	81.423	56.118	39.249	27.199	18.162	11.132	5.509

□□S15W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	14.850	14.700	14.550	14.400	14.250	14.100	13.950	13.800	13.650	13.500
RD (k Ω)	499.816	223.408	131.272	85.204	57.563	39.136	25.974	16.102	8.424	2.282