



# P-DUKE POWER

## MPS04 · MPH04 Series

DC-DC Converter  
Up to 3.5 Watts

**5**  
YEARS  
WARRANTY

ROHS  
COMPLIANT

REACH  
COMPLIANT



Medical



PV



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Railway



2 X MOPP
5000 VAC Reinforced Insulation
2 : 1 Input Range
LOW Leakage Current
Operating Altitude 5000 meter
REMOTE ON OFF
OVP
SCP
UVP

### PART NUMBER STRUCTURE



MPS04 -	48	S	05
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)
MPS04: SMD type	05:4.5~12	S:Single	05:5
MPH04: DIP type	12:9~18		09:9
	24:18~36		12:12
	48:36~75		15:15
			24:24
		D: Dual	12:±12
			15:±15

**TECHNICAL SPECIFICATION** All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	μF
MPS(H)04-05S05	4.5 ~ 12	5	700	70	77	1470
MPS(H)04-05S09	4.5 ~ 12	9	389	70	78	680
MPS(H)04-05S12	4.5 ~ 12	12	292	70	82	470
MPS(H)04-05S15	4.5 ~ 12	15	234	90	82	330
MPS(H)04-05S24	4.5 ~ 12	24	146	90	82	170
MPS(H)04-05D12	4.5 ~ 12	±12	±146	90	82	±220
MPS(H)04-05D15	4.5 ~ 12	±15	±117	95	81	±160
MPS(H)04-12S05	9 ~ 18	5	700	40	79	1470
MPS(H)04-12S09	9 ~ 18	9	389	40	79	680
MPS(H)04-12S12	9 ~ 18	12	292	45	82	470
MPS(H)04-12S15	9 ~ 18	15	234	45	82	330
MPS(H)04-12S24	9 ~ 18	24	146	50	82	170
MPS(H)04-12D12	9 ~ 18	±12	±146	50	82	±220
MPS(H)04-12D15	9 ~ 18	±15	±117	50	82	±160
MPS(H)04-24S05	18 ~ 36	5	700	25	79	1470
MPS(H)04-24S09	18 ~ 36	9	389	25	80	680
MPS(H)04-24S12	18 ~ 36	12	292	25	83	470
MPS(H)04-24S15	18 ~ 36	15	234	25	83	330
MPS(H)04-24S24	18 ~ 36	24	146	30	82	170
MPS(H)04-24D12	18 ~ 36	±12	±146	30	82	±220
MPS(H)04-24D15	18 ~ 36	±15	±117	30	82	±160
MPS(H)04-48S05	36 ~ 75	5	700	12	79	1470
MPS(H)04-48S09	36 ~ 75	9	389	12	80	680
MPS(H)04-48S12	36 ~ 75	12	292	13	82	470
MPS(H)04-48S15	36 ~ 75	15	234	13	82	330
MPS(H)04-48S24	36 ~ 75	24	146	13	82	170
MPS(H)04-48D12	36 ~ 75	±12	±146	13	82	±220
MPS(H)04-48D15	36 ~ 75	±15	±117	13	82	±160

**INPUT SPECIFICATIONS**

Parameter	Conditions	Min.	Typ.	Max.	Unit	
Operating input voltage range	5Vin(nom)	4.5	5	12	VDC	
	12Vin(nom)	9	12	18		
	24Vin(nom)	18	24	36		
	48Vin(nom)	36	48	75		
Start up voltage	5Vin(nom)			4.5	VDC	
	12Vin(nom)			9		
	24Vin(nom)			18		
	48Vin(nom)			36		
Shutdown voltage	5Vin(nom)	2	3	4	VDC	
	12Vin(nom)	6	7	8		
	24Vin(nom)	13	15	17		
	48Vin(nom)	29	32	35		
Start up time	Constant resistive load	Power up		10	20	ms
Input surge voltage	1 second, max.	Remote ON/OFF				
		5Vin(nom)			15	VDC
		12Vin(nom)			25	
		24Vin(nom)			50	
48Vin(nom)			100			
Input filter		Capacitor type				
Remote ON/OFF	Referred to -Vin pin and Ctrl pin applied current	DC-DC ON		Open or high impedance		mA
		DC-DC OFF		2.0	3.0	4.0
		Remote off input current		2.5		mA

**OUTPUT SPECIFICATIONS**

Parameter	Conditions	Min.	Typ.	Max.	Unit	
Voltage accuracy		-1.0		+1.0	%	
Line regulation	Low Line to High Line at Full Load	-0.2		+0.2	%	
Load regulation	No Load to Full Load	Single		+1.0	%	
		Dual		+1.0	%	
	10% Load to 90% Load	Single	-0.5		+0.5	%
		Dual	-0.8		+0.8	%
Cross regulation	Asymmetrical load 25%/100% FL	-5.0		+5.0	%	
Ripple and noise	Measured by 20MHz bandwidth	5Vout	50		mVp-p	
		9Vout	50			
		12Vout	50			
		15Vout	50			
		24Vout	75			
		±12Vout	75			
		±15Vout	75			
Temperature coefficient		-0.02		+0.02	%/°C	
Transient response recovery time	25% load step change		500		μs	
Over voltage protection	5Vout	6.0		8.0	VDC	
	9Vout	10.0		14.0		
	12Vout	13.0		19.0		
	15Vout	16.0		22.0		
	24Vout	25.0		35.0		
Short circuit protection		Continuous, automatics recovery				

**GENERAL SPECIFICATIONS**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute Reinforced insulation for 250 VAC working voltage	5000			VAC
Isolation capacitance			16	20	pF
Leakage current	240VAC, 60Hz			2	μA
Switching frequency		100			kHz
Clearance/Creepage		8			mm
Safety approvals	IEC/ EN/ ANSI/AAMI ES 60601-1 IEC/ EN/ UL 60950-1, 62368-1			UL:E360199 UL:E193009 CB:UL(Demko)	
Case material					Non-conductive black plastic
Base material					Non-conductive black plastic
Potting material					Silicone (UL94 V-0)
Weight					7.0g (0.24oz)
MTBF	MIL-HDBK-217F, Full load				5.041 x 10 <sup>6</sup> hrs


**ENVIRONMENTAL SPECIFICATIONS**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-40		+105	°C
Maximum case temperature				+105	°C
Storage temperature range		-55		+125	°C
Operating altitude				5000	m
Thermal shock				MIL-STD-810F	
Shock				MIL-STD-810F	
Vibration				MIL-STD-810F	
Relative humidity				5% to 95% RH	
Lead-free reflow solder process	Only for SMD type				IPC J-STD-020E
Moisture sensitivity level(MSL)	Only for SMD type				IPC J-STD-033C Level 2


EMC SPECIFICATIONS		
Parameter	Conditions	Level
EMI	EN55011, EN55032 and FCC Part 18 With external components	Class A, Class B
ESD	EN61000-4-2 Air ± 15kV and Contact ± 8kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 10 V/m	Perf. Criteria A
Fast transient	EN61000-4-4 ± 2kV	Perf. Criteria A
	MPS(H)04-05□□□ With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 1000µF/25V) and a TVS(SMAJ18A, 18V, 400Watt peak pulse power) in parallel.	
	MPS(H)04-12□□□ With an external input filter capacitor (Nippon chemi-con KY series, 470 µF/50V)	
	MPS(H)04-24□□□ With an external input filter capacitor (Nippon chemi-con KY series, 220 µF/100V)	
Surge	EN61000-4-5 ± 1kV	Perf. Criteria A
	MPS(H)04-05□□□ With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 1000µF/25V) and a TVS(SMAJ18A, 18V, 400Watt peak pulse power) in parallel.	
	MPS(H)04-12□□□ With an external input filter capacitor (Nippon chemi-con KY series, 470 µF/50V)	
	MPS(H)04-24□□□ With an external input filter capacitor (Nippon chemi-con KY series, 220 µF/100V)	
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A

**CAUTION:** This power module is not internally fused. An input line fuse must always be used.


## CHARACTERISTIC CURVE

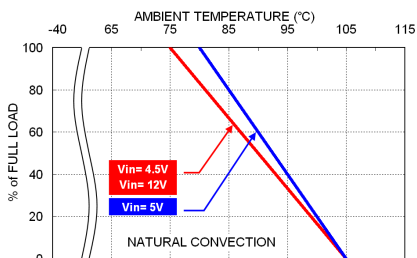


MPS(H)04-05□□□ Derating Curve

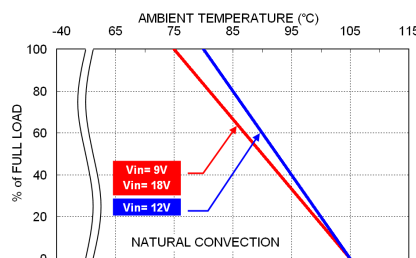


MPS(H)04-12□□□ Derating Curve

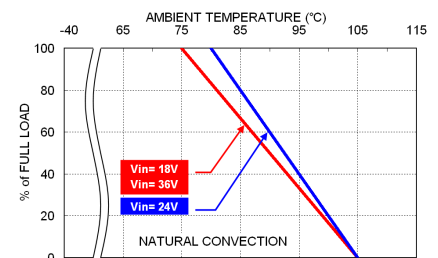


MPS(H)04-24□□□ Derating Curve

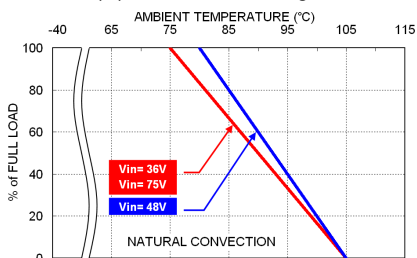

MPS(H)04-48□□□ Derating Curve

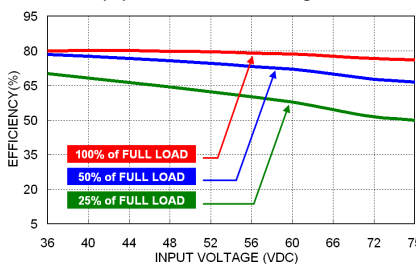

MPS(H)04-48S05 Efficiency vs. Input Voltage

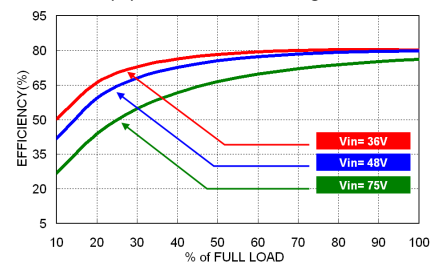

MPS(H)04-48S05 Efficiency vs. Output Current

## FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.


To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse. The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
MPS(H)04-05S□□、MPS(H)04-05D□□	1.6	Slow-Blow
MPS(H)04-12S□□、MPS(H)04-12D□□	0.8	Slow-Blow
MPS(H)04-24S□□、MPS(H)04-24D□□	0.5	Slow-Blow
MPS(H)04-48S□□、MPS(H)04-48D□□	0.315	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

## MECHANICAL DRAWING

### MPH04

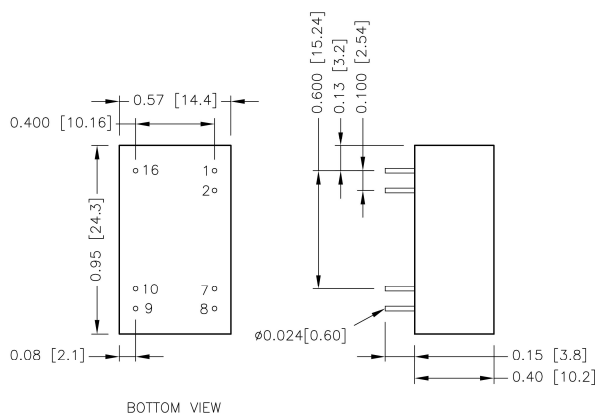


### PIN CONNECTION

PIN	SINGLE	DUAL
1	-Vin	-Vin
2	Ctrl	Ctrl
7	NC	NC
8	NC	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin


- All dimensions in inch [mm]
- Tolerance : x.xx±0.02 [x.x±0.5]  
x.xxx±0.010 [x.xx±0.25]
- Pin pitch tolerance ±0.010 [0.25]
- Pin dimension tolerance ±0.004 [0.10]

### MPS04

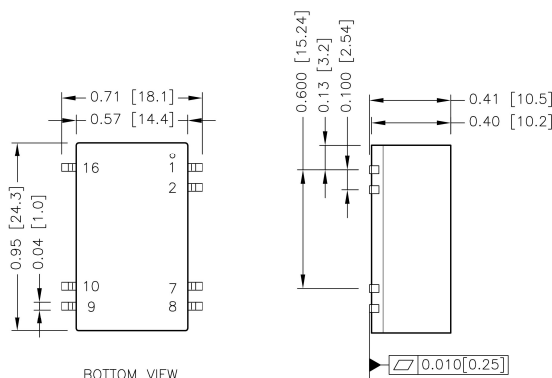


**RECOMMENDED PAD LAYOUT**

**MPH04**

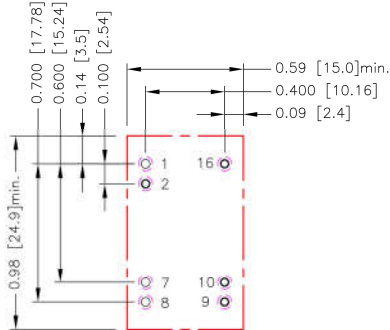

All dimensions in inch[mm]  
 Pad size(lead free recommended)  
 Through hole 1.2.7.8.9.10.16:  $\varnothing 0.035[0.90]$   
 Top view pad 1.2.7.8.9.10.16:  $\varnothing 0.044[1.13]$   
 Bottom view pad 1.2.7.8.9.10.16:  $\varnothing 0.071[1.80]$

**MPS04**

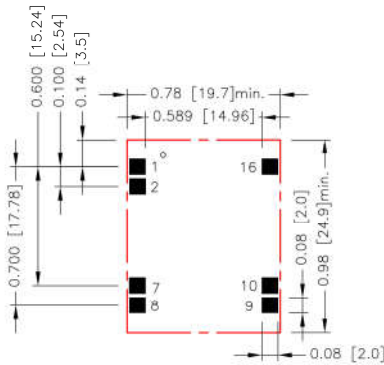


All dimensions in inch[mm]  
 Pad size(lead free recommended)  
 Top view pad:0.080x0.080[2.00x2.00]

- \* There should be at least 8mm distance between primary and secondary circuit.
- \*\* For further information, please contact P-DUKE.

**THERMAL CONSIDERATIONS**

The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding Environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed "Maximum case temperature". When Operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this Temperature to a lower value for extremely high reliability.



TOP VIEW